


# SABER MAX® PRIMARY CLEANER

- ✓ Simple Installation
- ✓ Low Maintenance
- ✓ Fast Delivery
- ✓ Heavy-Duty

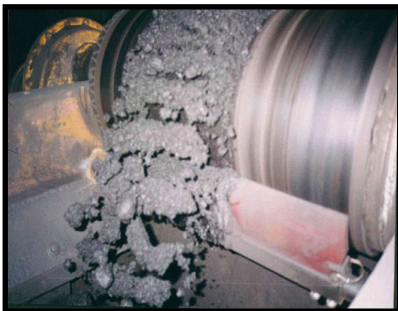
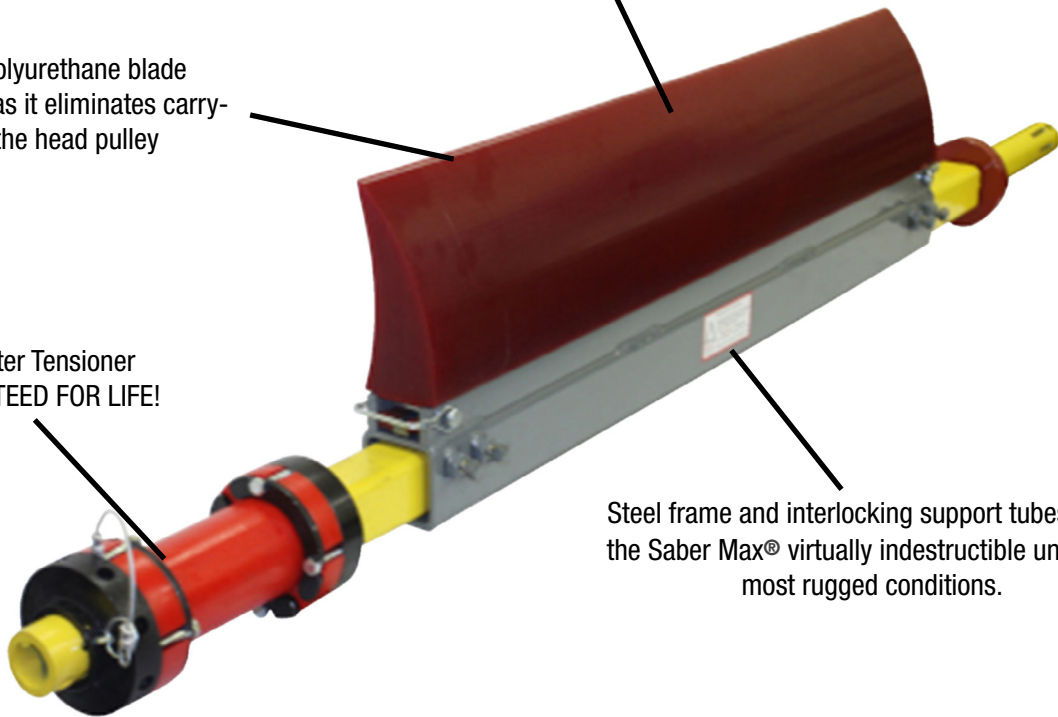
Curved blade aggressively attacks stubborn carryback and is safe for mechanical splices.



Massive, polyurethane blade self-sharpenes as it eliminates carryback at the head pulley

Patented Twister Tensioner core is **GUARANTEED FOR LIFE!**

Steel frame and interlocking support tubes make the Saber Max® virtually indestructible under the most rugged conditions.



- Patented *Twister Tensioner*® maintains constant blade-to-belt pressure and its core is **GUARANTEED FOR LIFE!**
- Compact mounting dimensions (only 4 1/2") for all conveyors.
- Available for up to 120" belts.
- Increases life of belts and idlers by eliminating harmful carryback.
- Single-piece blade for easy replacement in minutes
- Primary cleaner requires minimal maintenance.



## WHO IS ARCH ENVIRONMENTAL?

Manufacturer and worldwide distributor of preferred bulk conveyor components since 1975.



800.553.4567 [www.archenv.com](http://www.archenv.com)

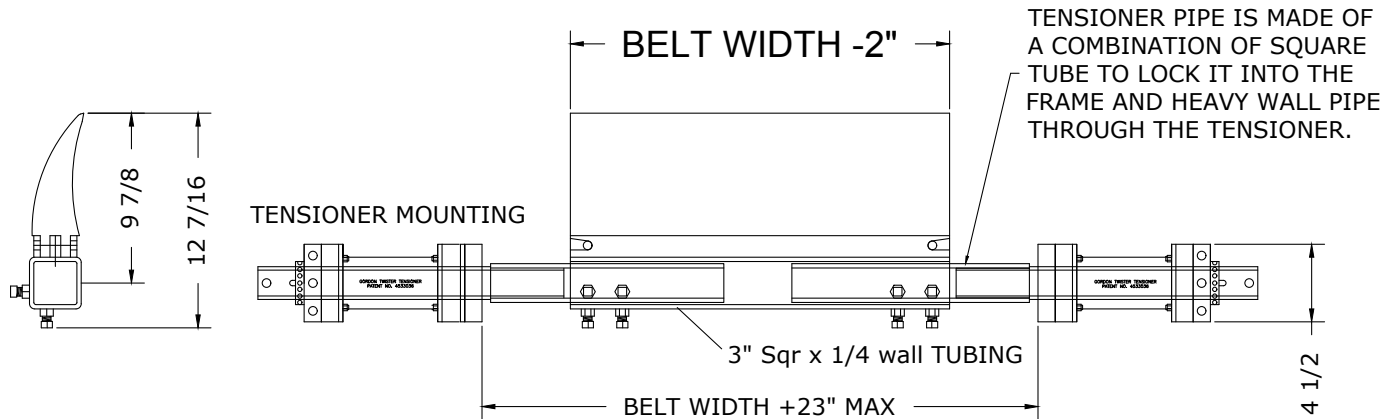
## MECHANICAL DIVISION

Belt Cleaners • Belt Alignment • Sealing Systems  
Dust Control Systems • Impact/Slider Systems

## ELECTRICAL DIVISION






Belt Scales • Metal Detectors • Pull Cord Switches  
Belt Protection Devices • Conveyor Control Systems

# SABER MAX<sup>®</sup> PRIMARY CLEANER



NOTE: IF LONGER SPAN IS REQUIRED, A LONGER MAINFRAME WILL BE REQUIRED. (CONSULT FACTORY FOR DETAILS)

## BELT CLEANER SELECTION GUIDE

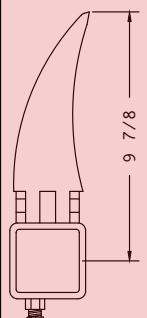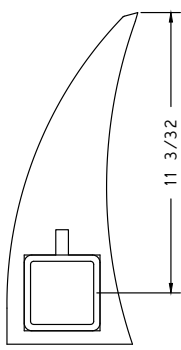PULLEY DIAMETER					
24"+ [609mm +]					
16"-36" [406mm-914mm]					
4"-16" [101mm-406mm]					
	48" MAX 				
	MINI	SB	SCM	MX	XS
BELT SPEED					
0-450 FPM [0-2.3m/s]					
450 FPM + [2.3m/s +]					

### Standard Blades (RED)

Temp Range: 180-220 F

### High-Moisture Blades (GRAY)

Temp Range: 180-220 F

15%+ Moisture Content

### Cermic Blades (BLUE)

High Friction/High Speed

750+ ft/min.

### High Temperature Blades (GREEN)

Temp Range: Up to 300 F

### Non-Pigment Blade (NATURAL)

Same as Standard Red Blades  
Ideal for color sensitive materials

### Food Grade (WHITE)

FDA approved for mild contact  
with food products.

Covered under one or more of the following patents:  
4,202,437;4,231,471;4,436,446;4,489,823;4,533,036;4,779,716;4,877,125;  
4,989,727;5,149,305;5,222,588;5,222,589;5,219,063;5,350,053;5,725,083  
other patents pending



Note: If available, prices vary with options.