FLEXISKIRT® SEALING SYSTEM

- ✓ Simple Installation
- ✓ Low Maintenance
- ✓ Corrosion Resistant
- ✓ Splice Safe
- ✓ Fast Delivery
- Heavy-Duty

Heavy-duty steel Flexiskirt holder firmly holds rubber in place to minimize shifting and belt gaps.

Replace seals in minutes with optional quick release handles and save valuable labor.



Flexible SBR rubber, commonly available in 1/2" or 3/8", conforms to belt surface creating spill-proof seal.



- Flexiskirt Sealing System eliminates spillage by controlling belt sag.
- Reduces belt wear by conforming to the belt's dynamics with minimal friction.
- Flexiskirt seal made to withstand temperatures up to 200 degrees.
- Grooved SBR rubber directs fines back down to the bulk flow preventing it from becoming airborne.
- Optional smooth SBR rubber recommended for reversing belts and positive pressure systems.
- Virtually maintenance free.
- Ideal with Simplicity Slider System.



WHO IS ARCH ENVIRONMENTAL?

Manufacturer and worldwide distributor of preferred bulk conveyor components since 1975.





800.553.4567 www.archenv.com


MECHANICAL DIVISION

Belt Cleaners • Belt Alignment • Sealing Systems Dust Control Systems • Impact/Slider Systems

ELECTRICAL DIVISION

Belt Scales • Metal Detectors • Pull Cord Switches Belt Protection Devices • Conveyor Control Systems

FLEXISKIRT® SEALING SYSTEM

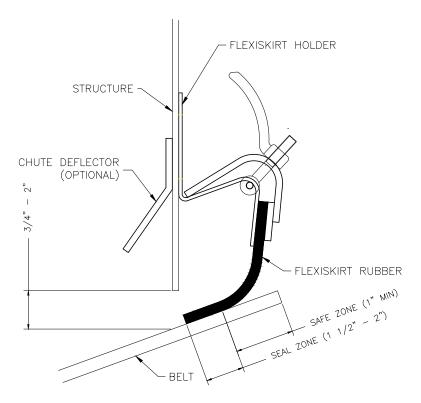

FLEXISKIRT HOLDER SELECTION TABLE					
TROUGHING ANGLE	QUICK RELEASE HANDLE	STANDARD NUT RELEASE			
- 20°	MHF2001-ST	MHF1001-ST			
20°	MHF2001-ST	MHF1001-ST			
35°	MHF2002-ST	MHF1002-ST			
45°	MHF2002-ST	MHF1002-ST			
+ 45°	MHF2002-ST	MHF1002-ST			

FLEXISKIRT HOLDERS SUPPLIED IN 5 FOOT LENGTHS ONLY

RUBBER AVAILABILITY TABLE					
RUBBER WIDTH	GROOVED TWO SIDES	GROOVED ONE SIDES	NO GROOVES	MSHA APPROVED	
6"		/		/	
8"		/	/	/	
10"		/	/	/	
12"		/	/	X	

FLEXISKIRT IS MANUFACTURED OF SBR RUBBER
RUBBER IS SUPPLIED IN 25 FOOT AND 50 FOOT ROLLS ONLY
GROOVED RUBBER IS NOT RECOMMENDED FOR REVERSING BELTS

